| NOZZLE SCHEDULE | | | | | | | |
|---|---|---|---|---|---|---|---|
| ITEM | SIZE | RATING | TYPE | MATL | PROJ IN | PROJ OUT | REMARKS |
| A | ¾" | N.P.T. | W.F. | C.S. | STD. | STD. | DRAIN |
| B | 2" | N.P.T. | W.F. | C.S. | STD. | STD. | |
| C | 4" | N.P.T. | W.F. | C.S. | STD. | STD. | EMERGENCY VENT OPENING |




DETAIL A




TOP VIEW




LEFT SIDE

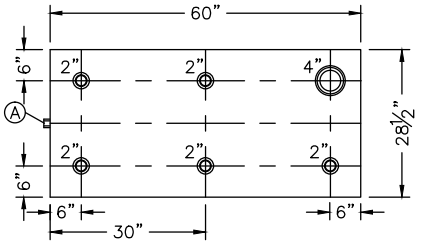


FRONT VIEW

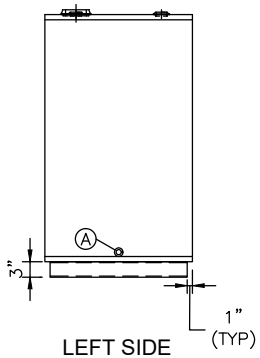


RIGHT SIDE

## NOTES:

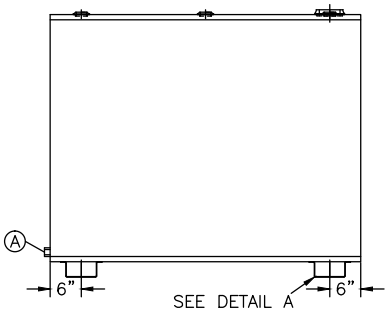A. Quantity:
B. Material: H.R. Carbon Steel
C. Tank: 12 GA w/ 10 GA Top
D. Design & Operating Pressure: Atmospheric.
E. Design & Operating Temperature: Ambient.
F. Tank to be Built & Labeled per U.L. Spec. #142.
G. Tank to Bear Manufacturers & U.L. Labels Only.
H. Tank to be Air Tested with Water & Soap Suds Solution.
I. Interior: Remove Weld Slag (Ship Clean & Dry).
J. Exterior: Gray primer included; see Sales Order for top coat.
K. All Fittings to be Protected for Shipment.
L. Customer has the Responsibility to Verify All Dimensions.

*All pages of this Schedule A are incorporated by reference and are a part of the additional terms of the Master Terms & Conditions of Sale.
www.newberrytanks.com/masterterms.pdf

APPROVAL FOR CONSTRUCTION
SCHEDULE A - MASTER TERMS & CONDITIONS OF SALE*

☐ APPROVED AS DRAWN.

☐ APPROVED WITH NOTED CHANGES, CONSTRUCTION WILL BE SCHEDULED WHEN SIGNED DRAWING AND CONFIRMED ORDER ARE RECEIVED.

SIGNATURE_____
DATE:_____

SALES ORDER #

FLUIDALL®

860 Johnson Drive
Delano, MN 55328
www.fluidall.com

VESSEL DESCRIPTION:

350 GALLON SLIM SINGLE WALLED TANK

| CUSTOMER: | | | P.O.# |
|---|---|---|---|
| DATE: | SCALE: | DWG.# SSWSST350 | DRAWN BY: TC |
| | | | CHKD. BY: TB |